



ESLON®-DC ESD

PVC CS421AS


ESD-Standard

CS421AS I ■ smoked-brown

SPECTRAL TRANSMITTANCE [%]

DAYLIGHT
380 - 780 nm

INFRARED
from 780 nm

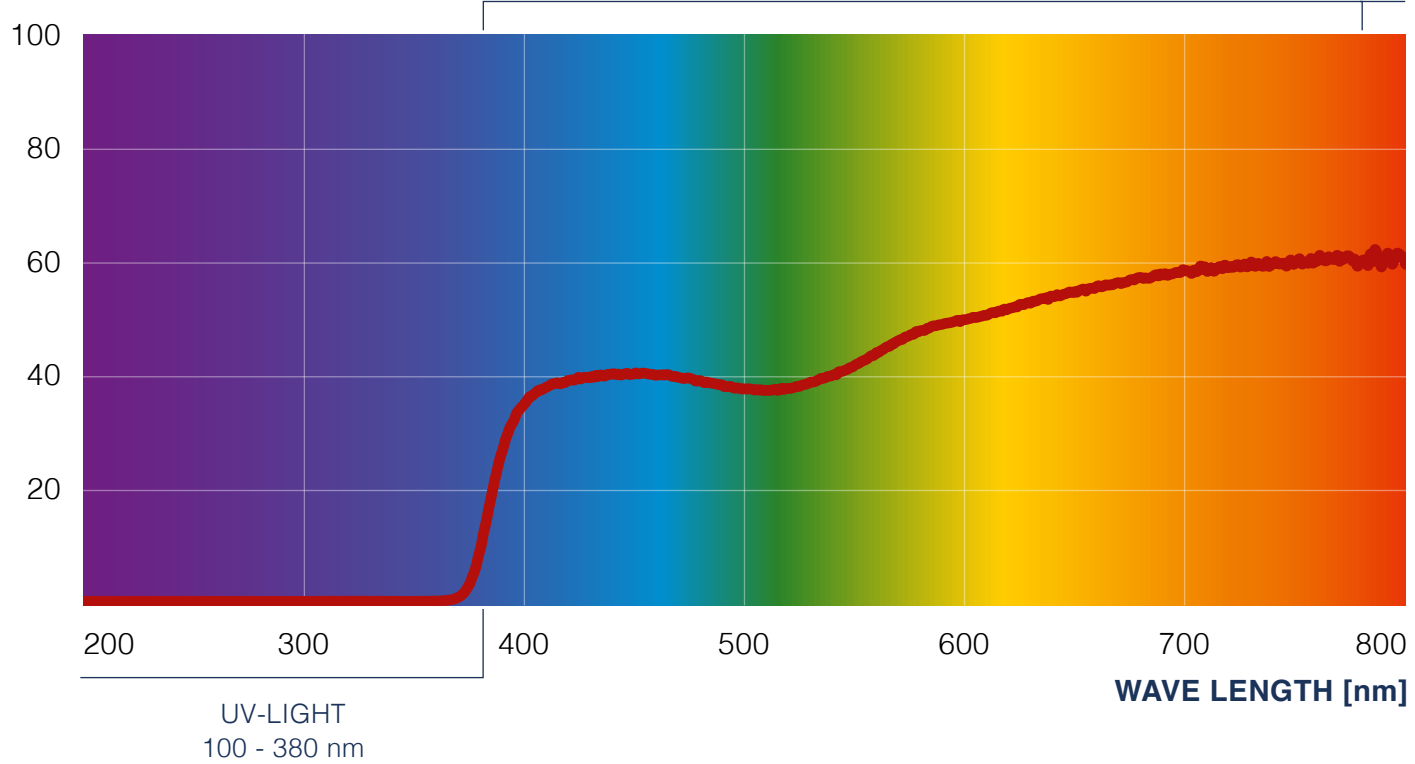

UV-RANGE ACC. TO DIN 5031

- UV-A** 315nm - 380 nm
- UV-B** 280nm - 315 nm
- UV-C** 100nm - 280 nm

TRANSMITTANCE VALUE

24 %

HAZE VALUE

7 - 9 %

REFRACTIVE INDEX

1.53

All data refer to a **sheet thickness of 3mm.**

www.eslon-dc.de



SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de